




Electro-Voice



Performance beyond
the reach of the
competition.

BRAIN POWER

Intelligent technology,
innovative design.



ETX Powered Loudspeakers

electrovoice.com

Performance beyond the reach of the competition.

BRAIN POWER

Intelligent technology, innovative design.



EV's FIR-Drive utilizes the latest Finite Impulse Response (FIR) filter technology to optimize transducer linearity. Advanced limiter algorithms for independent peak and thermal transducer protection.




Complete full-function DSP control via a single-knob interface. LCD screen for easy system set-up and monitoring: location/application EQ presets (e.g. tripod, mounted, suspended, live, music, speech), limiter status, input level controls/meters and master volume control to ensure optimal gain structure. Parametric EQ allows for more precise configuration. Subs feature a preset for true cardioid performance.



EV-patented Signal Synchronized Transducers (SST) waveguide design provides precise and consistent coverage across all system configurations. Waveguides are custom-designed and optimized per model.

State-of-the-art components deliver the legendary EV sound quality and reliability the pros trust: 1800 W (subs) and 2000 W (full-range) Class-D power amplifiers with integrated DSP produce high SPLs utilizing high-sensitivity, low-distortion transducers (including DVX and SMX series woofers and precision DH3-B HF titanium compression drivers).

Lightweight, ergonomic, durable and compact 18-mm, 13-ply birch plywood enclosures finished with EVCoat. Eight mounting points for permanent installations (full-range models). Custom die-cast aluminum pole cups, handles and hardware.



Designed, engineered, tested and assembled for ultimate reliability by Electro-Voice.

TOP OF THE LINE

ETX-12P

ETX-15P

ETX-35P

ETX-15SP

ETX-18SP

ETX-10P


Positioned above the ZLX, ELX, and EKX series respectively, ETX Powered Loudspeakers are the fully loaded flagship members of the award-winning EV portable sound family. They are engineered from the ground up to be the highest-specification products in their category, designed to deliver an uncompromising combination of advanced audio performance and all-around versatility.

Six models are available, each fully equipped for equally spectacular results across a wide range of applications. They are ideal for pro musicians, DJs, mobile entertainers, and rental companies looking for high-end compact sound reinforcement, and will ensure concert-quality finesse in small/medium permanent installations. Each model provides sound quality, power, and features beyond the reach of other similarly sized professional-grade powered speakers – tour-quality sound in a tidy, easy-to-use package.

Developed using the latest engineering software, industrial design, and manufacturing processes, the series brings real innovation to multi-purpose loudspeaker design, all backed up by over 85 years of unmatched pro-audio know-how: EV-engineered high-efficiency transducers, high-powered Class-D amplifiers, Signal Synchronized Transducers (SST) waveguide design, powerful and intuitive QuickSmartDSP, and multiple on-board performance optimization and protection features – all packaged in low-profile tour-grade wood enclosures, all working together to provide peerless EV sound quality and precise coverage at the highest SPLs.

SIGNAL SYNCHRONIZED TRANSDUCERS (SST) WAVEGUIDE DESIGN

- Unique to the industry, with multiple design and utility patents.
- Third generation (after Tour X FM and ZLX models).
- Waveguides custom-designed and optimized per model.
 - This allows EV to design the waveguide to have uniform beamwidth response throughout the waveguide's passband and allows a smooth transition between woofer beamwidth and waveguide beamwidth.
 - This also allows EV to use much larger waveguides without making the speaker larger.
 - This optimization also achieves a flat sound power—critical to great sound in any application.
- The waveguide is placed forward in the enclosure to help physically time-align the LF and HF transducers, minimizing the need for latency correction via DSP.
- Placing the port under the waveguide positions it in its ideal acoustic location in the enclosure without spacing the woofer and driver apart. The port location minimizes distortion and standing waves inside the loudspeaker.
- All waveguides are optimized using advanced simulation software and proprietary algorithms for precise control and lowest distortion.

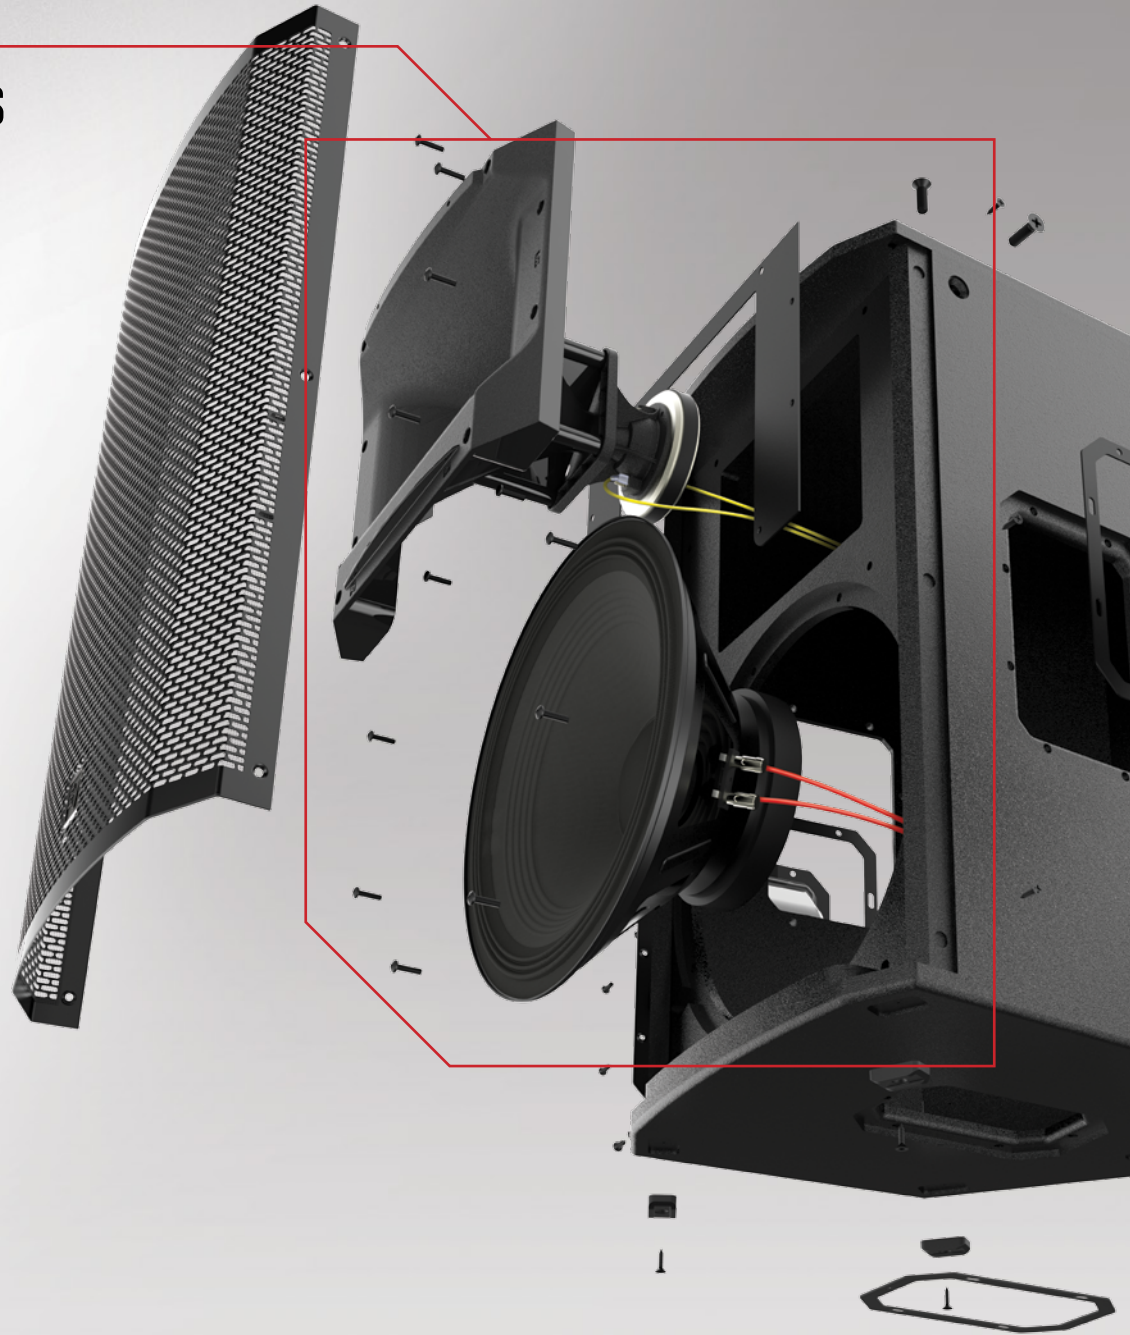


HIGH-SENSITIVITY, LOW-DISTORTION TRANSDUCER DESIGN

- EV focuses on creating high-sensitivity woofers and compression drivers that have linear frequency response and high power handling (competitors use smaller motor designs to save cost).
- The small diaphragm, convex-loaded phase plug and tight manufacturing tolerances of the DH3-B allows for high frequency extension to 20 kHz and beyond, and the high-sensitivity design achieves maximum SPL requirements similar to competitive large-format compression drivers.
- The motor designs are optimized using advanced modeling software and tested extensively, ensuring the transducers have low distortion at full output.



- All ETX Powered Loudspeaker woofers use Faraday rings for significantly better vocal reproduction.
- The woofers not only have high power handling but also feature a robust mechanical design to ensure long-term reliability.
- EV focuses on engineering transducers with linear frequency response, minimizing the need for additional equalization.

PROFESSIONAL-GRADE COMPONENTS AND TESTING

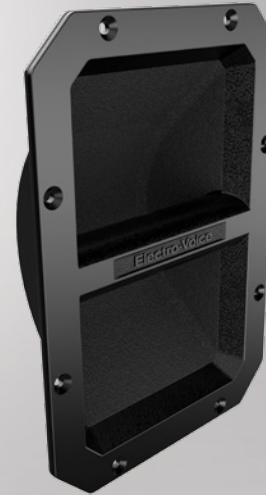

- All ETX Powered Loudspeaker components are designed from the ground up by Electro-Voice. No off-the-shelf components are used.
- The handles, pole cups and amplifier chassis are die-cast aluminum, not plastic.
- 18-mm, 13-ply birch plywood with EVCoat is used throughout the product line, a combination that offers best-in-class looks and durability.
- In addition to industry-standard pink noise abuse tests, all models must survive EV's proprietary 1000-hour torture test that uses real-world signals driven beyond full output.



BEST-IN-CLASS PROCESSING AND CONTROL

- System DSP presets support quick and easy setup via selections for type of use, crossover frequencies and top/sub combinations.
- Subwoofers include a DSP preset for “true cardioid” configuration.
- Employs the same proprietary PAL and TEMP limiters developed for EV concert/touring loudspeakers.
 - Not all limiters are created equal: EV spends a lot of design effort on making sure its processing is as acoustically transparent as possible.
 - The limiters are displayed on the rear LCD and on the front-grille LED.
- Employs the same proprietary FIR-Drive developed for EV concert/touring loudspeakers. The filters are linear phase and use extremely steep crossover slopes.



- Boundary compensation filters are included so that a loudspeaker sounds the same whether it is used as a floor monitor, on a tripod or suspended from a ceiling.
- User-adjustable features not found on any other loudspeakers in this class, including delay out to several hundred feet, three-band parametric equalization, polarity and multiple high-pass crossover points.
- The Class-D design of the amplifier is highly efficient and features blower-controlled thermal management, allowing it to work in hot environments. The fan is of a very quiet design and does not turn on under normal circumstances.
- Lockout mode helps prevent casual users from changing settings.



10

ETX-10P



10" TWO-WAY POWERED LOUDSPEAKER

- 10-inch LF SMX woofer
- 1.25-inch HF titanium compression driver
- 2000 W Class-D power amplifier with integrated FIR-Drive DSP
- 134 dB peak SPL

ETX-12P

12



12" TWO-WAY POWERED LOUDSPEAKER

- 12-inch LF SMX woofer
- 1.25-inch HF titanium compression driver
- 2000 W Class-D power amplifier with integrated FIR-Drive DSP
- 135 dB peak SPL

15

ETX-15P

ETX-35P

15 3-WAY



15" TWO-WAY POWERED LOUDSPEAKER

- 15-inch LF SMX woofer
- 1.25-inch HF titanium compression driver
- 2000 W Class-D power amplifier with integrated FIR-Drive DSP
- 135 dB peak SPL

15" THREE-WAY POWERED LOUDSPEAKER

- 15-inch LF SMX woofer
- 6.5-inch MF driver
- 1.25-inch HF titanium compression driver
- 2000 W Class-D power amplifier with integrated FIR-Drive DSP
- 136 dB peak SPL

15 SUB

ETX-15SP



15" POWERED SUBWOOFER

- 15-inch DVX woofer for maximum punch
- 1800 W Class-D power amplifier with integrated FIR-Drive DSP
- 134 dB peak SPL
- Special DSP preset for true cardioid performance across the full operating bandwidth
- Combo pole cup (insert and threaded) for use with full-range models
- Removable casters

ETX-18SP


18 SUB



18" POWERED SUBWOOFER

- 18-inch DVX woofer for extended low-frequency response
- 1800 W Class-D power amplifier with integrated FIR-Drive DSP
- 135 dB peak SPL
- Special DSP preset for true cardioid performance across the full operating bandwidth
- Combo pole cup (insert and threaded) for use with full-range models
- Removable casters


TECHNICAL SPECIFICATIONS




ETX-10P




ETX-12P




ETX-15P



ETX-35P







ETX-15SP




ETX-18SP

Frequency Response (-3dB):	85 Hz - 20 kHz ¹	55 Hz - 20 kHz ¹	48 Hz - 20 kHz ¹	48 Hz - 20 kHz ¹	37 Hz - 150 Hz ²	33 Hz - 150 Hz ²
Frequency Range (-10dB):	65 Hz - 20 kHz ¹	43 Hz - 20 kHz ¹	40 Hz - 20 kHz ¹	38 Hz - 20 kHz ¹	32 Hz - 180 Hz ²	28 Hz - 180 Hz ²
Maximum SPL:	134 dB peak ³	135 dB peak ³	135 dB peak ³	136 dB peak ³	134 dB peak ³	135 dB peak ³
Coverage (H x V):	90° x 60°	90° x 60°	90° x 60°	60° x 40°		
Power Rating:	2000 W	2000 W	2000 W	2000 W	1800 W	1800 W
LF Transducer:	SMX2100 254 mm (10 in)	SMX2120 300 mm (12 in)	SMX2150 380 mm (15 in)	SMX2151 380 mm (15 in)	DVX3159A 380 mm (15 in)	DVX3180A 457 mm (18 in)
MB Transducer:				EVS-6C 6.5-in mid-bass driver		
HF Transducer:	DH3-B 1.25-in titanium compression driver					
Crossover Frequency:	1700 Hz	1600 Hz	1500 Hz	700 Hz, 2900 Hz		
Low Pass Frequency:					Adjustable: 80 Hz, 100 Hz, 120 Hz, 150 Hz	
Connectors:	(2) XLR/TRS combo jack and (1) XLR link output				(2) XLR/TRS Combo Jack and (2) XLR link Output	
Enclosure:	18-mm, 13-ply birch plywood with EVCoat					
Grille:	16AWG steel with powdercoat					
Suspension:	(8) M10 suspension points					
Dimensions (H x W x D):	21 in x 13 in x 14 in (526 mm x 330 mm x 365 mm)	24 in x 15 in x 16 in (613 mm x 381 mm x 400 mm)	27 in x 17 in x 18 in (691 mm x 431 mm x 447 mm)	40 in x 18 in x 17 in (1023 mm x 469 mm x 426 mm)	19 in x 23 in x 32 in (471 mm x 576 mm x 825 mm)	22 in x 27 in x 36 in (550 mm x 675 mm x 910 mm)
					<i>Without casters:</i> 19 in x 23 in x 27 in (471 mm x 576 mm x 692 mm)	<i>Without casters:</i> 22 in x 27 in x 31 in (550 mm x 675 mm x 777 mm)
Net Weight:	44.8 lb (20.3 kg)	52.0 lb (23.6 kg)	61.1 lb (27.7 kg)	84.2 lb (38.2 kg)	91.9 lb (41.7 kg)	114.2 lb (51.8 kg)
Shipping Weight:	50.5 lb (22.9 kg)	59.1 lb (26.8 kg)	69.5 lb (31.5 kg)	94.4 lb (42.8 kg)	103.2 lb (46.8 kg)	129.9 lb (58.9 kg)
Power Consumption:	100 - 240 V~, 50 - 60 Hz, 1.6 - 0.8 A ⁴					



¹Full space measurement using the music DSP preset. ²Half space measurement using the music DSP preset and 150 Hz low pass.

³Maximum SPL is measured at 1 m using broadband pink noise at maximum output. ⁴Current rating is 1/8 power.

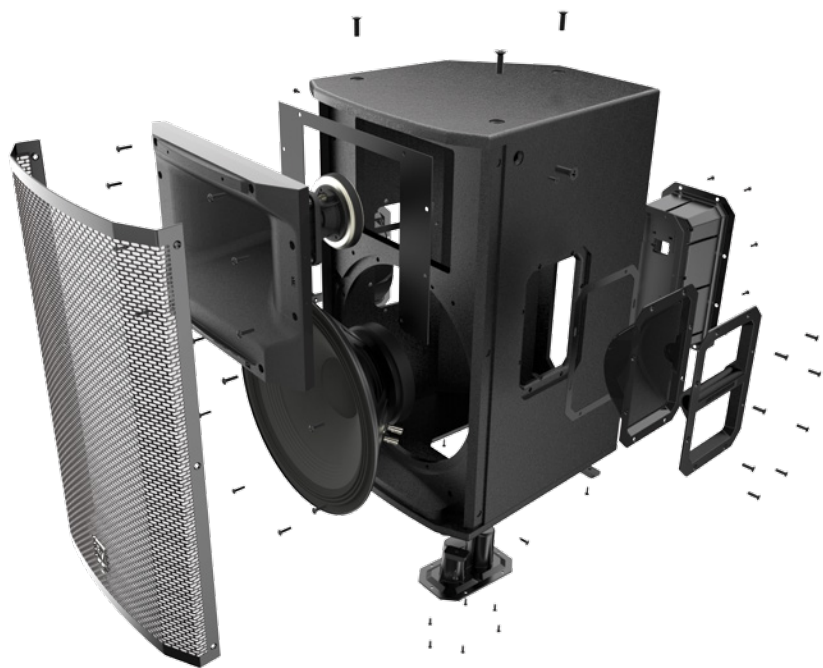

Electro-Voice